


Vinyl Link Mats



Musson Vinyl Link Mats retain their vibrant colors, are reversible, give years of service. Available in solid colors, standard field designs or special designs. Letters or numerals can be woven in Mats; must be

at least 5" high in CW-16; 11" high in OW-18. Furnished with matching or contrasting color nosing attached on all sides, 1-1/2" stub for recess use (or 2" beveled for surface use.)

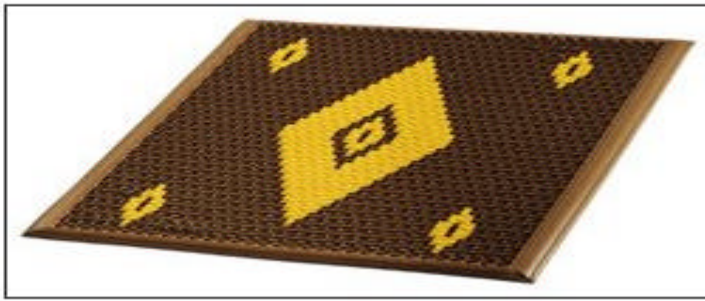


Wires should run the short dimension of mat; same cleaning action whether traffic moves parallel or perpendicular to wires. Rust resistant spring steel wire is standard; (brass wire at extra cost). Maximum size 8' x 12', (maximum wire length 8'). Large areas should be made in sections.

Close weave No. CW-16



Close-Weave Link Mats have very tiny openings, approximately 1/16" X 1/2". Only dirt and water will fall through; will not catch or trip the smallest heel. Links are 2" long x 7/16" thick x 1/2" wide. Individual links have extra weight at stress points and extra strong ribs for cleaning action.

Open weave No. OW-18



Open-Weave Link Mats have openings between links large enough to prevent hazardous wedging of spike heels, approximately 1/2" x 1". Links are 2" long x 7/16" thick x 1/2" wide. Links have extra weight at stress points and extra strong ribs for cleaning action. Ideal for school, factory and heavy traffic use.

Square weave No. SW-20



Square-Weave Link Mats have minute slit openings between links that will not catch or trip even the tiniest heel. Openings are merely a slit 2" long. Links are 2" long x 2" wide x 7/16" thick. Links have extra weight at stress points and extra strong ribs for cleaning action.

LYN Distributing

Phone: (800) 366-5022

Fax: (801) 292-6196

Email: sales@lyndist.com

Website: www.lyndist.com